


NOTE #1: THESE HOLES DIMENSIONED FOR REFERENCE ONLY. FOR BEST PERFORMANCE HOLES MUST BE TRANSFERRED FROM VALVE TO BODY WITH INLET PORTS ALIGNED. SEE INSTRUCTIONS FOR PROPER ALIGNMENT STEPS.

NOTE #2: MAKE SURE THE DEPTH OF THE .125 NPT THREAD WILL NOT ALLOW THE BRASS FITTINGS TO PROTRUDE THROUGH THE BOTTOM SURFACE OF THE MOUNTING PLATE. THIS WILL INTERFERE WITH ASSEMBLY.

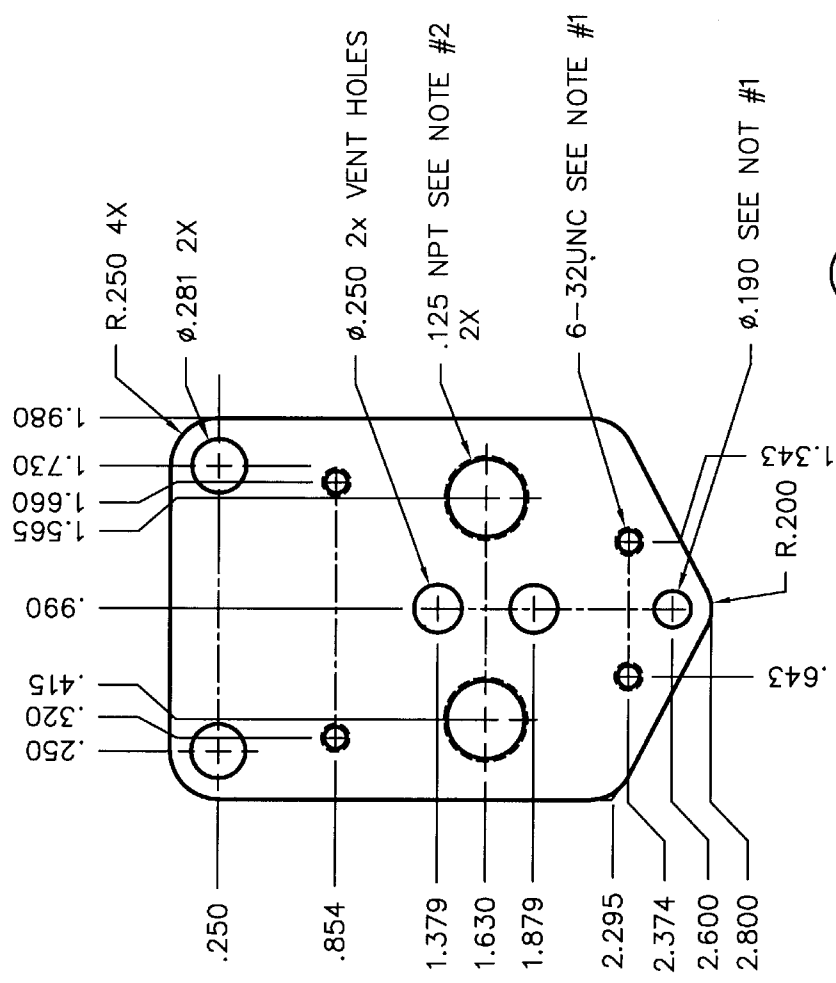

7

VALVE MOUNTING
ALUMINUM
1 REQD.

MATERIAL .25 ALUMINUM
6061-T6 BAR OR PLATE

WWW.HOMESHOPACCESSORIES.C		DWG NO
VALVE MOUNTING PLATE		REV. 1
SCALE 1:1	SEE A	JUNE 2006
DATE 2/2/07	SHEET	